

The roller stands for axial movement of pipes is designed for horizontal movement (supply) of pipes as part of transport (roller table) lines.

Application area - pipe base, oil and gas industry.




The roller stands for axial movement consists of a base, a roller, bearing assemblies and a gear motor.



Technical Specification:

Diameter of transported pipes, mm	73-178
Length of transported pipes, m	13
Roller working part materialp	oolyurethane
Gear motor type	worm
Electric motor power of the gear motor, kW	0,25
Roller speed, rpm	23,3
Power supply:	
- voltage, V	380 ± 10%
- current frequency, Hz	50 ± 2%
Overall dimensions, mm	
Length	508
Width	418
Height	255
Weight, no more, kg	39

This product can be manufactured according to the technical specifications of the customer, taking into account its predetermined parameters and features.

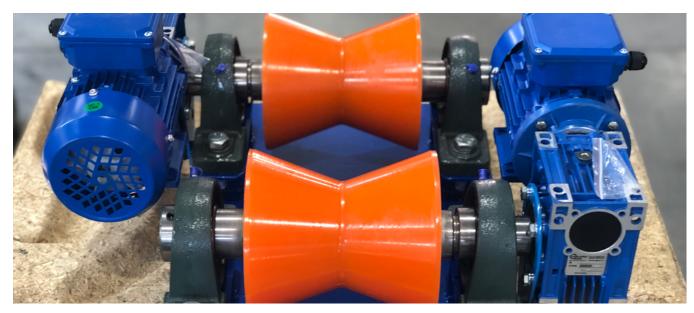





Full cycle engineering services

Food Machinery

Machinery for tires, rubber, plastics manufacturing

Machinery for the chemical and oil and gas industry

Machinery for the perfumery and cosmetic industry

Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

Outsourcing services - repair and maintenance of equipment



Policon JSCo 194 Lermontov Str, Omsk 644009, Russia Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30 e-mail: info@policon-rt.ru www.policon-rt.ru