



POLICON
Engineering & Manufacturing

Tank $V = 5 \text{ m}^3$

Tank $V = 5 \text{ m}^3$



Description

Tank is intended for storage and the subsequent overflow in a container of mineral water.

The standard complete includes:

1. Manhole DN 600 at the top;
2. Clean the ball - pressure 1 bar, radius of action 2.5 m;
3. Breather valve at the top of the tank;
4. Nozzle DN 50 - 2 pcs;
5. Nozzle discharge DN 65;
6. Flange DN 50 - 4 pcs;
7. Flange DN 65 - 2 pcs.



Tank $V = 5 \text{ m}^3$

Technical Specifications:

Type of tank.....	horizontal
Volume, m^3	5
Length, mm.....	3050
Diameter, mm.....	1680
Number of supports, pcs.....	4
Material:	
support sheet 10 mm.....	Stainless steel (AISI 304)
sheath capacity sheet 3 mm.....	Stainless steel (AISI 304)
casing sheet 0.5 mm.....	Stainless steel (AISI 304)
end walls sheet 5 mm.....	Stainless steel (AISI 304)
Thermal insulation, mm.....	100
Pressure.....	atmospheric

This product can be made according to the technical task of the customer, given its specified parameters and features.



Food Machinery

Machinery for tires, rubber, plastics manufacturing


Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

**Outsourcing services - repair and maintenance
of equipment**

Global engineering solutions

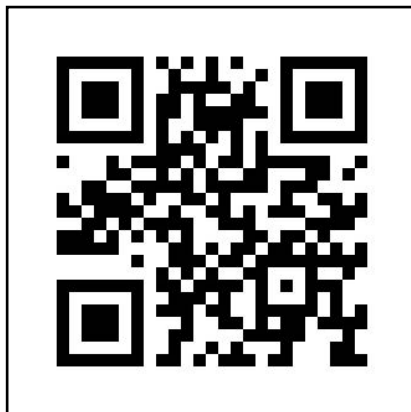

Policon JSCo

194 Lermontov Str, Omsk 644009, Russia

Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30

e-mail: info@policon-rt.ru

www.policon-rt.ru