



POLICON
Engineering & Manufacturing

Belt loading conveyor

Belt loading conveyor

The belt loading conveyor is designed for receiving rubbers and sheet masterbatch from conveyor-type scales and loading them into a rubber mixer in the preparatory production of tire, cable plants and factories of rubber technical products.



Features:

- the conveyor is driven by a drum motor or gear motor.
- the conveyor is equipped with a material availability sensor to stop the conveyor after filling it with material.

Technical Specification:

Type of conveyor stationary

The distance between the axes of the drums, mm, no more 3 500

Width of conveyor belt, mm 800

Linear speed of the tape, m / s 0,5

Power supply

voltage, V 220/380

frequency Hz 50

Electric motor power, kW 1,5

Overall dimensions, mm, no more

length 3,700

width 1 220

height 1 425

Weight, kg, no more 750

This product can be manufactured according to the technical specifications of the customer, taking into account its predetermined parameters and features.

Full cycle engineering services

Food Machinery

Machinery for tires, rubber, plastics manufacturing

Machinery for the chemical and oil and gas industry


Machinery for the perfumery and cosmetic industry

Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

Outsourcing services - repair and maintenance of equipment

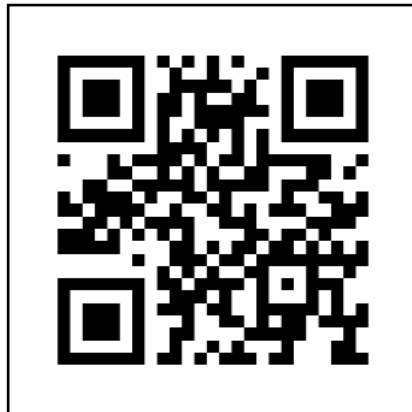

Policon JSCo

194 Lermontov Str, Omsk 644009, Russia

Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30

e-mail: info@policon-rt.ru

www.policon-rt.ru