



POLICON
Engineering & Manufacturing


***Equipment for cutting
a metal cord tire breaker
(Model AMB 30-70M)***

The equipment is intended for cutting a rubberized metal cord web with a guillotine width of up to 850 mm into double workpieces at an angle of 30 to 70 degrees.



Features:

- Equipment capacity of 40 m/min
- The accuracy of cutting workpieces 1mm
- Guillotine type cutting machine with hydraulic drive.
- Longitudinal cutting machine with a knife of increased diameter, which allows you to simultaneously produce two workpieces of different widths and increases the productivity of the equipment
- Modern control system using a controller that allows you to implement various service functions: fault display with the allocation of graphical information on the display
- Pneumatic equipment from FESTO, CAMOZZI, SMC.

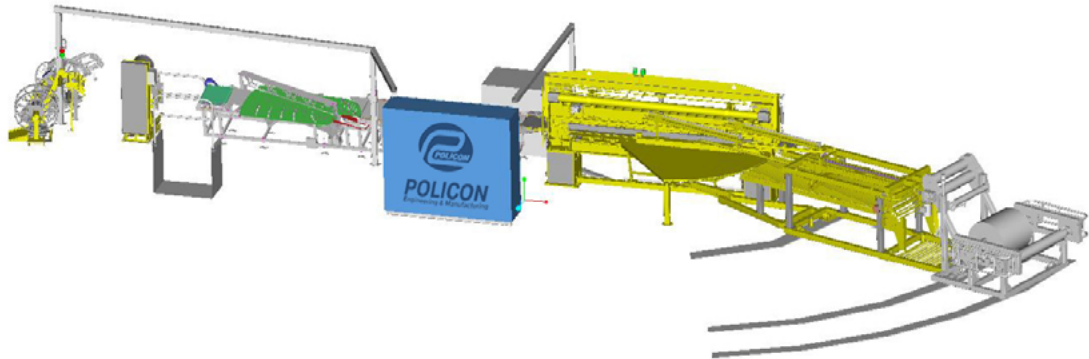

Technical Specification:

Width of the material to be cut, mm, no more.....	850
The thickness of the material to be cut, mm, no more	3
The angle of cutting, degrees	30 - 70
Cutting accuracy of workpieces:	
in width, mm	±1
by angle, degree	±0,5
Equipment performance, max, m / min: (when cutting workpieces at an angle of 70 degrees with a width of up to 260 mm after longitudinal cutting).....	40
Installed power of electric motors, kW, no more	30
Overall dimensions, mm:	
length	20 550
width	9 160
height	2 175
Weight, kg, no more	14 500

This product can be manufactured according to the technical specifications of the customer, taking into account its predetermined parameters and features.

Full cycle engineering services

Food Machinery

Machinery for tires, rubber, plastics manufacturing

Machinery for the chemical and oil and gas industry


Machinery for the perfumery and cosmetic industry

Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

Outsourcing services - repair and maintenance of equipment

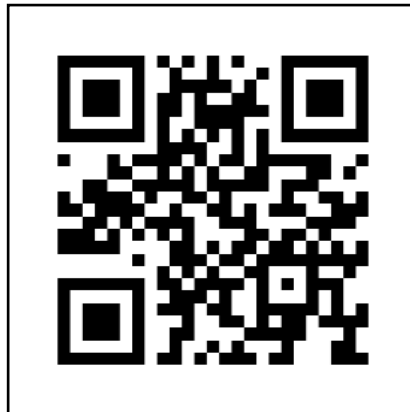

Policon JSCo

194 Lermontov Str, Omsk 644009, Russia

Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30

e-mail: info@policon-rt.ru

www.policon-rt.ru