



POLICON
Engineering & Manufacturing

Heated tank
V = 40 liters

Heated tank V = 40 liters

Heated tank for receiving the softener from the weigh batcher, storing it in a preheated state and transmitting it to the input valve in the rubber mixer in the preparatory production of tire, cable factories and factories of rubber products.



Features:

- the surface of the tank and pipelines in contact with the softener are made of stainless steel.
- branch pipes for softener input and output are provided on the tank
- a level switch is installed to monitor the emptying of the tank.
- a gear pump is installed to feed the softener from the tank to the inlet valve.

Technical Specification:

Full volume, l	50 ± 2
Working volume, l	40 ± 2
Operating temperature inside the tank, OS	80 - 90
Steam consumption for heating, kg / h, no more	5
Steam temperature, OS	155 - 5
Type of level relay	vibration
Installed power of the pump electric drive, kW	5,5
Power supply:	
current.....	variable
frequency, Hz	50
voltage, V	380
Overall dimensions, mm, no more	
length	1 140
width	850
height	1 428
Weight, kg, no more	420

This product can be manufactured according to the technical specifications of the customer, taking into account its predetermined parameters and features.

Full cycle engineering services

Food Machinery

Machinery for tires, rubber, plastics manufacturing

Machinery for the chemical and oil and gas industry


Machinery for the perfumery and cosmetic industry

Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

Outsourcing services - repair and maintenance of equipment

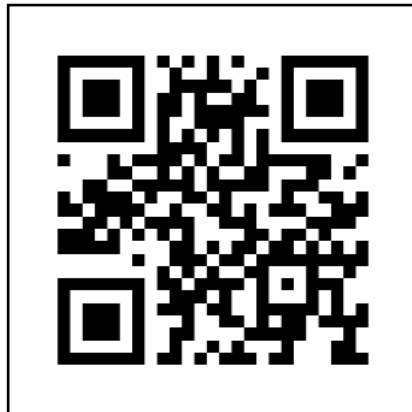

Policon JSCo

194 Lermontov Str, Omsk 644009, Russia

Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30

e-mail: info@policon-rt.ru

www.policon-rt.ru