

Acceptance and weighing of liquid and molten softeners in the preparatory production of tire, cable, asbestos factories and rubber products factories.








#### Features:

- high accuracy of weighing
- stainless steel cargo receiving device
- weighing control system based on a programmable controller
- software elimination of the influence of vibrations of the load receiving device.



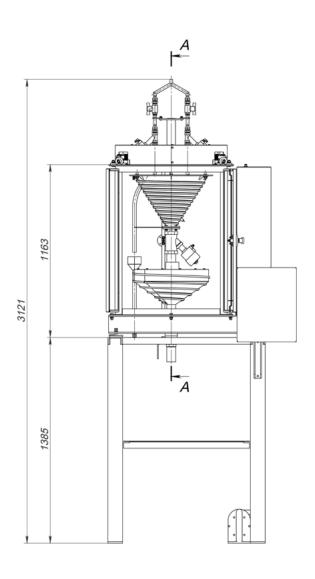

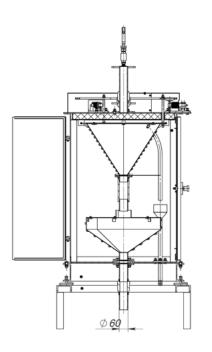



#### **Technical Specification:**

Type of scalestationary
Accuracy class
Compressed air pressure in the pneumatic system, MPa
Type of heating element, Inheating cable
Heating element power supply, V
Power supply:
currentconstant voltage, V

Parameter Name	Model	
	VTMe-15	VTMe-25
Weighed material on the scales	Liquid and molten softener γ=0.85-1.1 t / m3	Liquid and molten softener γ=0.85-1.1 t / m3
Maximum weighing limit, kg	15	25
Number of weight sensors	3	3
Weighing cycle of a single component, s, no more than	50	50
Overall dimensions, mm, no more:		
length	1 120	1 120
width	1 010	1 010
height	2 300	2 300
Weight, kg, no more	420	450

This product can be manufactured according to the technical specifications of the customer, taking into account its predetermined parameters and features.

### Full cycle engineering services

#### **Food Machinery**

Machinery for tires, rubber, plastics manufacturing

Machinery for the chemical and oil and gas industry


Machinery for the perfumery and cosmetic industry

Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

Outsourcing services - repair and maintenance of equipment



Policon JSCo 194 Lermontov Str, Omsk 644009, Russia Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30 e-mail: info@policon-rt.ru www.policon-rt.ru